



EP305

Product name
Earth Positive® Mock Neck Sweatshirt

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
Brushed Fleece 3-ply 8.9 oz/yd² 300 g/m²

Commodity code **Origin**
6110 2091 00 India

Available sizes
S M L XL 2XL

Certifications




Available colours



Black
BL



Sueded Black
SUBL

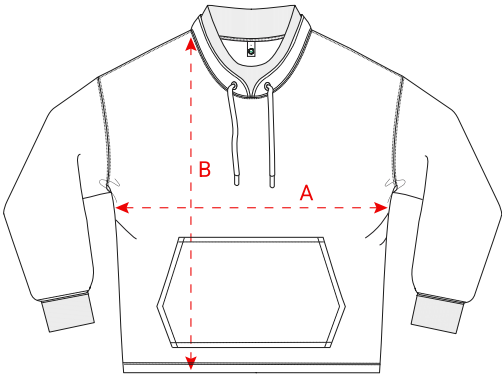

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
S	55	21½	68	26¾
M	58	22¾	71	28
L	61	24	73	28¾
XL	64	25¼	75	29½
2XL	67	26¼	76	30



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours					Sueded colours				
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
	Black BL					Sueded Black SUBL			



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton solid colours (excluding RFD & Sueded colours)	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min